


REV.	DESCRIPTION	DATE	BY
A	redesign for 400hz twistlock	6/11/08	SB

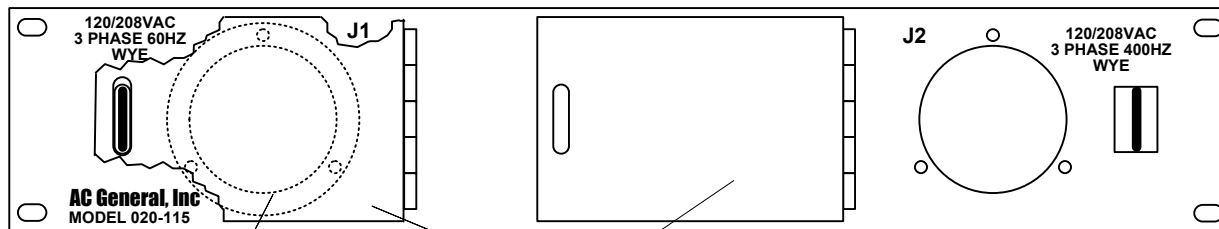

Hole Dia (both): 2.25", (3) mounting holes, 3/16" dia, equally spaced on 2-11/16" bolt circle

Hinged Lockout Cover with hasp thru-hole

Dim: 19.00" x 3.5" x 0.187"
 Color: FS 595 Chip 26496 (light gray)
 EIA-310D Compliant

Notes:

Designed for two Locking Flanged Inlet connectors rated at 120/208VAC service. Panel is marked with service ratings:

- J1 will accept L21-20P or L21-30P
- J2 will accept 400 Hz, Hubbell 45985CL (non-NEMA)

AC General, Inc.		10 Technology Drive #316 Hudson, MA 01749 (978) 568-8229	
AC Lockout Panel, Dual Input, 120/208 VAC Three Phase 60 Hz and 120/208 VAC Three Phase 400 Hz			
SK 020-115 Rev 0.vsd	SIZE	FSCM NO	DWG NO SK 020-115
Print date: 8/16/2024	SCALE	1 : 1	SHEET 1 OF 1
			REV A